


HS- SESSMMO 开关盒 不锈钢-具有在线扩展的输出


主要特点

- BNC接插件和2针MS接插件输出
- 提供一个通过便携式数据收集器从加速度计读取数据的端子
- 一拖多输出
- 易于安装


6 Way



12 Way

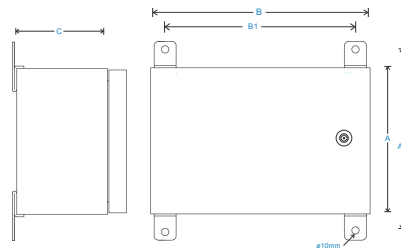

16 Way

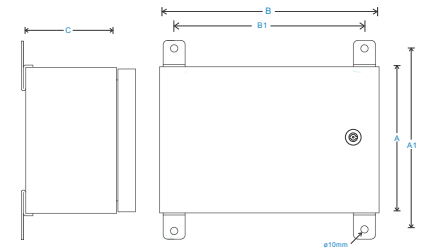

Technical Performance

Inputs	Via accelerometer	Door	Lock and polyamide key
Output	BNC and 2 Pin MS as standard	Glanding	Glands supplied but not fitted Holes are punched for: Single input M12 - \varnothing 3.5-7mm cable Single input M20 - \varnothing 7-13mm multi-core cable Multi input M20 - 3 x \varnothing 5.3mm
Mounting Board	PCB Panel	Labelling	Channel locations - other labelling available upon request
Material	304 Stainless Steel	Mounting	supplied are 4 x Brackets
Termination	Quick-release terminal	EMC	EN61326-1:2013
Dimensions	see: 'How To Order' table		
Sealing	IP66		

How To Order

