HS-420 Accelerometer

4-20mA velocity output via 2 Pin MS Connector


Key Features

· For use with PLC/DCS systems

Customisable features

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

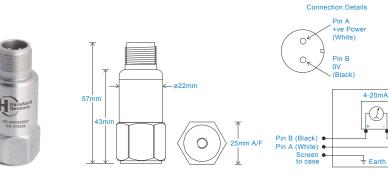

Technical Performance Mechanical	
Mounted Base Resonance 5kHz min Case Material	Stainless Steel
Velocity Ranges see: 'How To Order' table ±10% Sensing Element/Construction P	ZT/Compression
Nominal 80Hz at 22°C Mounting Torque	8Nm
Frequency Response 10Hz (600cpm) to 1kHz (60kcpm) ± 5% - ISO10816 Weight 1	00gms (nominal)
Isolation Base isolated Screened Cable Asssembly see: www.hansfordsensors	s.com for options
Range 50g peak Connector HS-AAC	004 - non-booted
Transverse Sensitivity Less than 5% HS-AA053 or HS	-AA054 - booted
Mounting Threads see: 'How	w To Order' table

Electric	
гесшс	а

Current Output 4-20mA DC proportional to Velocity Range Supply Voltage 15-30 Volts DC (for 4-20mA) Settling Time 2 seconds **Output Impedance** Loop Resistance 600 Ohms max. at 24 Volts >108 Ohms at 500 Volts Case Isolation

Environmental

Operating Temperature Range Sealing Maximum Shock EMC


-25 to 1	20°C
	IP68
50)00g
EN61326-1:2	2013

Power Supply

PLC/DCS

0V

Typical Frequency Response

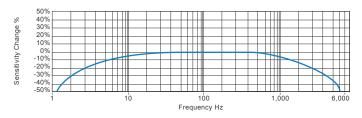


Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

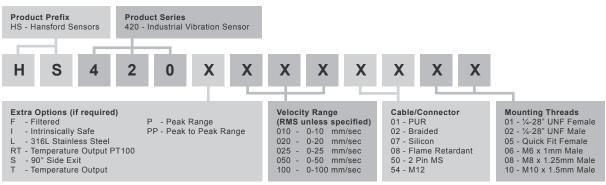



T: 150 210 98804 www.hansfordsensors.com.cn 汉施弗德传感器(上海)有限公司

