HS-421T Accelerometer

4-20mA velocity, AC acceleration and temperature output via M12 Connector




Technical Performance		Mechanical
Mounted Base Resonance	5kHz min	Case Material
Velocity Ranges	see: 'How To Order' table ±10%	Sensing Element/Construction
	Nominal 80Hz at 22°C	Mounting Torque
Frequency Response: 4-20mA	10Hz (600cpm) to 1kHz (60kcpm) ± 5%	Weight
	- ISO10816	Screened Cable Assembly
Frequency Response: AC	2Hz (120cpm) to 10kHz (600kcpm) ± 5%	
	- ISO10816	Mounting Threads
Isolation	Base isolated	
Range	see: 'How To Order' table	
Temperature Output 10mV/°C	C - 0-1V proportional to 0-100°C (to convert	
	this to 4-20mA use the HS-540 module)	
Transverse Sensitivity	Less than 5%	

=1	ect	rical	

Outputs	4-20mA DC current proportional to
	Range and AC acceleration
Bias Voltage	3 Volts DC (nominal)
Supply Voltage	15-30 Volts DC (for 4-20mA)
Settling Time	2 seconds
Output Impedance	Loop Resistance 600 Ohms max. at 24 Volts
Case Isolation	>10 ⁸ Ohms at 500 Volts

Typical Frequency Response (4-20mA signal)

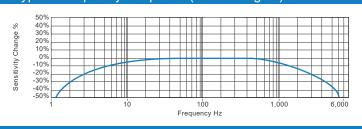

Environmental

0

Ν

E

Operating Temperature Range
Sealing
Maximum Shock
EMC

-25 to 90°C IP67 5000g EN61326-1:2013

Stainless Steel

8Nm

PZT/Compression

150gms (nominal) body only HS-AC303 - straight

HS-AC032 - right angle

see: 'How To Order' table


Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

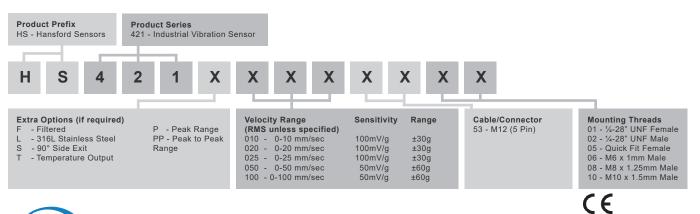



T: 150 210 98804 www.hansfordsensors.com.cn 汉施弗德传感器(上海)有限公司