HS-423T Accelerometer

4-20mA acceleration, AC acceleration and temperature output via M12 Connector


Key Features

- Unique output
- · For use with PLC/DCS systems
- and data collectors
- · Temperature output

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical




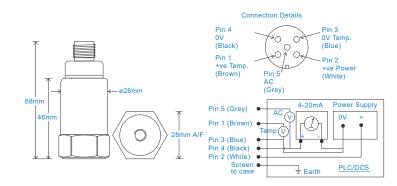

Technical Performance		Mechanical	
Mounted Base Resonance	10kHz min	Case Material	Stainless Steel
Acceleration Ranges	see: 'How To Order' table ±10%	Sensing Element/Construction	PZT/Compression
	Nominal 80Hz at 22°C	Mounting Torque	8Nm
Frequency Response: 4-20mA	10Hz (600cpm) to 5kHz (300kcpm) ± 5%	Weight	135gms (nominal) body only
	- ISO10816	Screened Cable Assembly	HS-AC303 - straight
Frequency Response: AC	2Hz (120cpm) to 10kHz (600kcpm) ± 5%		HS-AC032 - right angle
	- ISO10816	Mounting Threads	see: 'How To Order' table
Isolation	Base isolated		
Range	see: 'How To Order' table		
Temperature Output 10mV/°C	- 0-1V proportional to 0-100°C (to convert		
	this to 4-20mA use the HS-540 module)		
Transverse Sensitivity	Less than 5%		
Electrical		Environmental	
Current Output	4-20mA DC current proportional to	Operating Temperature Range	-25 to 90°C
•	acceleration and AC acceleration	Sealing	IP67
Bias Voltage	3 Volts DC (nominal)	Maximum Shock	5000g
-			•

Supply Voltage 15-30 Volts DC (for 4-20mA) Settling Time 2 seconds **Output Impedance** Loop Resistance 600 Ohms max. at 24 Volts >108 Ohms at 500 Volts Case Isolation

Typical Frequency Response (4-20mA signal)



Applications

EMC

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment


Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



JK

EN61326-1:2013

How To Order

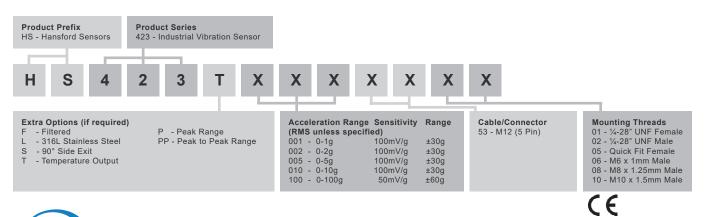



T: 150 210 98804 www.hansfordsensors.com.cn 汉施弗德传感器(上海)有限公司